
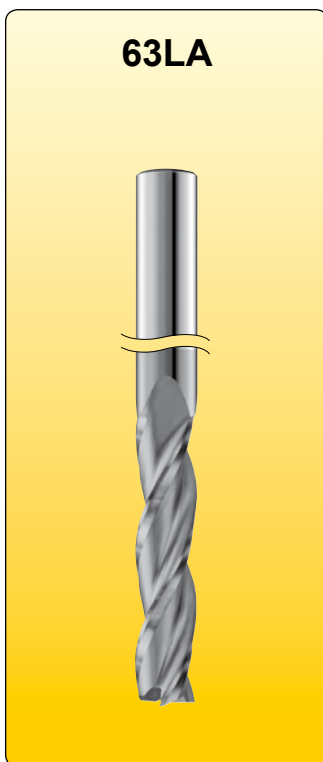


Schafffräser - Z=3 Drall 30° - WN überlang End mills - Z=3 Helix 30° - Internal standard long


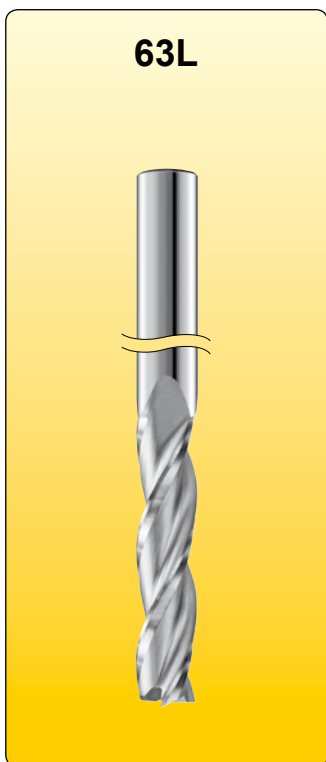


Einsatzgebiete / Range of application

C: Stahlwerkstoffe / Steels
C1.1-1.8 C2.1-2.4 C3.1-3.2 C4.1-4.2

D: Edelstahl / Stainless Steel
D1.1-1.5

F: Gußeisen / Cast irons
F1.1-1.5 F2.1-2.4

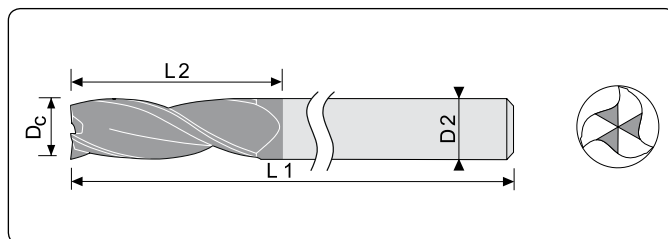

D _c h10	L2	L1	D2 h6	63L	63LA
					Beschichtet / Coated
3	18	60	3	63L.030	63L.030A
4	20	60	4	63L.040	63L.040A
5	25	62	5	63L.050	63L.050A
6	30	70	6	63L.060	63L.060A
8	35	79	8	63L.080	63L.080A
10	40	89	10	63L.100	63L.100A
12	50	100	12	63L.120	63L.120A
14	58	125	14	63L.140	63L.140A
16	58	125	16	63L.160	63L.160A
18	58	125	18	63L.180	63L.180A
20	60	125	20	63L.200	63L.200A