


Schruppfräser - Z=4 Drall 30° - DIN 6527-L Roughing end mills - Z=4 Helix 30° - DIN 6527-L

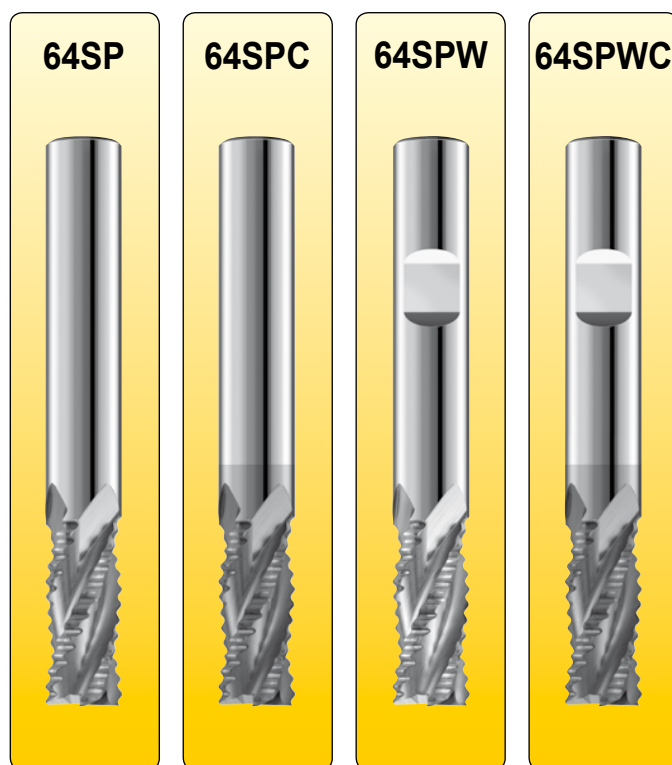



Einsatzgebiete / Range of application

C: Stahlwerkstoffe / Steels
C1.1-1.8 C2.1-2.3 C3.1 C4.1

D: Edelstahl / Stainless Steel
D1.1-1.4

E: Titan / Titanium
E2.1

F: Gußeisen / Cast irons
F1.1-1.2 F1.4-1.5 F2.1-2.2

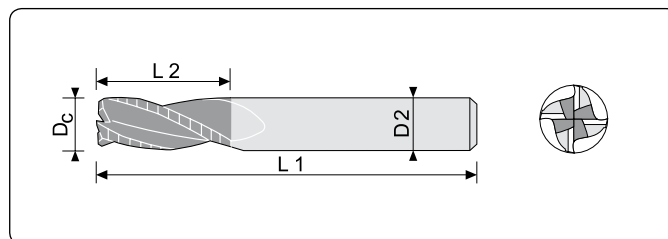

D _c h10	L2	L1	D2 h6	64SP	64SPC	64SPW	64SPWC
					Beschichtet / Coated		Beschichtet / Coated
6	13	57	6	64SP.060	64SP.060C	64SPW.060	64SPW.060C
8	19	63	8	64SP.080	64SP.080C	64SPW.080	64SPW.080C
10	22	72	10	64SP.100	64SP.100C	64SPW.100	64SPW.100C
12	26	83	12	64SP.120	64SP.120C	64SPW.120	64SPW.120C
14	26	83	14	64SP.140	64SP.140C	64SPW.140	64SPW.140C
16	32	92	16	64SP.160	64SP.160C	64SPW.160	64SPW.160C
18	32	92	18	64SP.180	64SP.180C	64SPW.180	64SPW.180C
20	38	104	20	64SP.200	64SP.200C	64SPW.200	64SPW.200C
25	45	120	25	64SP.250	64SP.250C	64SPW.250	64SPW.250C

2.
06